

Tuber Type Kochsiek SM 61

year of manufacturing 1992, reconditioned 2013/2014

Technical Data:

Flush Cut and Stepped-end

4 Layers

2 Colours

Tube width 28 – 65 cm

Tube length 40 – 130 cm



Tuber Type 61/62

Type	Model 61	Model 62
Tube length range	40-130 cm	40-130 cm
Tube width range	28-65 cm	28-80 cm
Paper web width	133 cm max.	163 cm max.
Maximum output	325 tubes/min 280 m/min	
Number of plys	2-6	




The modern high speed universal tubing machine is arranged for the manufacture of flush-out and stepped-end tubes, with or without gussets. The large format area ensures a wide usage possibility.

A newly designed machine head with a belt assisted multipoller system for the draw and snatch-off ensures a particularly quiet and gentle production of paper tubes.

Size change times are kept low due to the special clamping system for glue and perforating former parts, as well as through scaled setting aids, and can be kept down to a minimum when using a programmable setting system which is available on request.



Tube styles

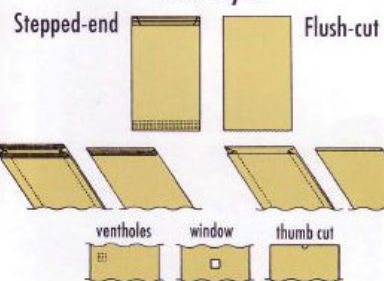

Additional units such as window die-cutting and PE welding devices as well as microperforating rollers allow production of all standard paper tube types.

